

# ELEVATION ROOF ORDER FORM

Company Name ➤ .....

Order Number ➤ .....

Job Reference ➤ .....

Company Contact ➤ .....

Telephone No. ➤ .....

Fax No. ➤ .....

Delivery Address ➤ .....

.....


.....

.....

Delivery Date Req ➤ .....

Quotation Ref ➤ .....

All dimensions to be **INTERNAL FRAME SIZE**, showing desired bar centres

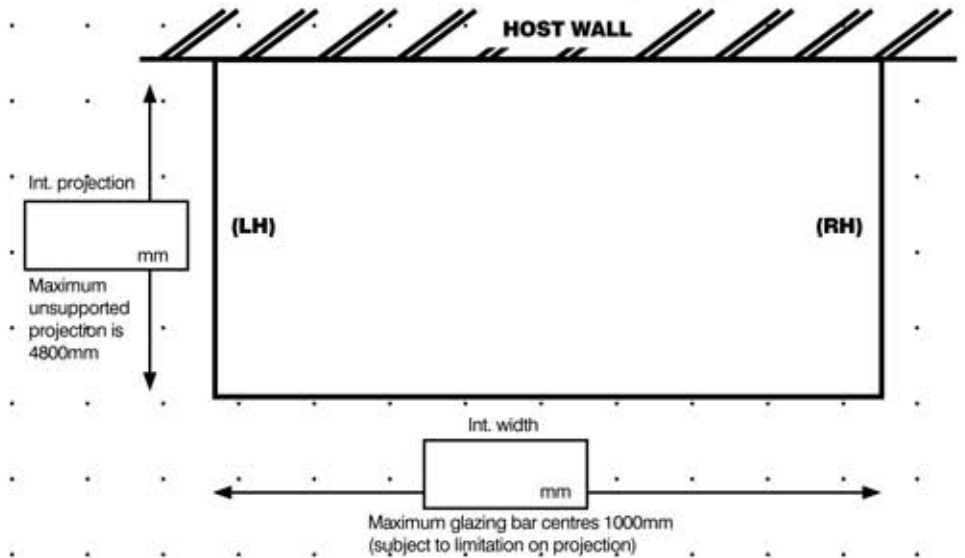

**Elevation Plus** Please indicate hip requirements

**Abutment bars** Please indicate wall side and abutment bar detail. N.B. short abutment = 1/2 internal projection

**Box gutter** Please attach the separate box gutter order form along with this completed sheet

**Roof vents** Please indicate location

**Roof Pitch**  N.B. Elevation Plus - roof pitch is fixed at 5° with the hips fixed at 28.5°

## COLOUR/FOIL OPTIONS

### EXTERNAL COLOUR

White  Deeplas (blue white)  Light Oak  Rosewood

### INTERNAL COLOUR

White  Deeplas (blue white)  Light Oak  Rosewood

## GLAZING OPTIONS

### POLYCARBONATE THICKNESS

25mm  35mm  35mm polycarbonate roofs - 972mm is the maximum dimension from internal frame tie to the first transom bar

### POLYCARBONATE COLOUR

Clear  Opal  Bronze  Bronze/Opal  Heatguard  Unglazed (for 24mm glass)

## GLASS

**ANTI SUN (1.2)**  **ANTI SUN (1.5)**  **CLEAR**   
**A1 (Blue)**  **A2 (Grey)**  **B1 (Blue)**  **B2 (Grey)**  **C1 (1.2)**  **C2 (1.5)**

**Spec for glass roof:**  
 500mm bar ctrs - 4000mm\* projection, 750mm bar ctrs - 3500mm\* projection, 1000mm bar ctrs - 3250mm\* projection

\*Based on 4/16/4 sealed units with 0.6kNm<sup>2</sup> loading

## SPACER BAR COLOUR

Silver  Bronze  Gold  White

If you require Conservaglass for the side frames, please complete a separate accompanying sheet. If you require 28mm units it is critical to clearly mark this on your side glass order (24mm is our default)

## ROOF OPTIONS LEFT HAND (LH) & RIGHT HAND (RH)

Furring  Short abutment  Full abutment  Hipped end (Plus)   
 LH RH LH RH LH RH LH RH  
 short abutment = 1/2 internal projection

## FIRRING REINFORCEMENT

None  Aluminium  Aluminium & Steel  Raked Frame   
 (not supplied by Ultraframe)

## FIXING KIT

Yes  No

## CONSERVAFLASH

Yes  No

## GUTTERING

Left Side  Right Side  Double Offset bend (for rainwater pipe)

## ROOF VENT OPTIONS

### MANUAL

Chrome  Brass  Pole

### ELECTRIC

Switch  Thermo/Rain Sensor

PLEASE SIGN BELOW & FAX BACK TO 01245 32 51 88

DATE .....

**ultraframe**